

# 6250-C/6250A-C

## SOFT SERVE FREEZER

Two Flavor, Floor, Digital Control  
A: Pump Feed Model



### **Powerful** and **Versatile**

Two flavor medium capacity floor model for ice cream, frozen yogurt and much more

#### **Fast Freeze Down**

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

#### **Digital Control and Display**

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

#### **Auto Programming**

Allows automatic switching of operation modes based on preset schedules

#### **Standby**

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

#### **Hopper Agitator**

Maintain product consistency and prevent product separation

Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



#### **Soft System Start**

Slow motor start reduces equipment noise and stress on drive train

#### **Direct Drive Transmission**

Eliminates consumable moving parts and increases transmission efficiency

#### **Safety Protections**

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

#### **Defrost for Cleaning**

Increases efficiency during cleaning by heating frozen product in cylinder

#### **Quick Freeze**

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period



#### **Self-closing Valve with Speed Control**

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



# 6250-C / 6250A-C

# SOFT SERVE FREEZER

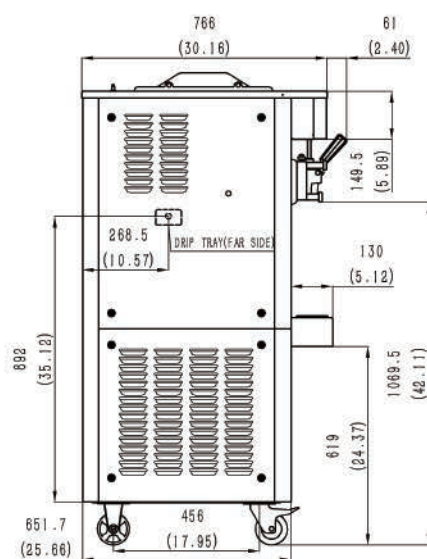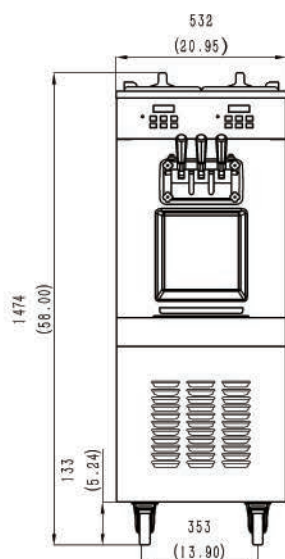

## SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L (8L for A)
Output Capacity (80 grams)	450 serves/hr
Clearance Requirements	152mm/6" on back

## Weight

	Kg/lb (Gravity)	Kg/lb (Pump)
Net	210 / 467	220 / 489
Shipping	230 / 511	240 / 533

Volume 0.90 CBM / 28.85 CBF

## Dimensions

	Net (mm/in)	Shipping (mm/in)
Width	532 / 20.9	660 / 23.6
Depth	652 / 25.7	830 / 32.7
Height	1474 / 58.0	1640 / 64.6

## Electrical

	MFS	MCA	Power(kW)
220-240/50/1	20	16	3.2
208-230/60/1	20	18	3.5

## FEATURES

Control Systems	Two, Digital
Refrigerated Hoppers	✓
Hopper Agitators	✓
Temperature Displays	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓

## AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice