

Project

Date

Models

**I-PRO 3M**  
**I-PRO 3M light panel**  
**I-PRO 3E**  
**I-PRO 3E light panel**

Item#

Quantity




model I-PRO 3M  
with light panel

## FEATURES

- Most advanced professional slush, sorbet, and granita machine in the world. High performance, ultramodern design, and user-friendly.
- (3) 2.9 gallon (11 L) insulated bowls with either mechanical or electronic control board and timer, and optional light panel.
- Insulating technology increases cooling power, saves energy and money, and reduces external condensation.
- Transparent bowl encourages impulse purchasing.
- Manual defrost mode.
- Efficient safety mechanism is activated when cover is lifted. All moving parts automatically and immediately stop.
- Lockable lid.
- Adjustable product consistency.
- Perfect solution for restaurants, coffee shops, bars, amusement parks, convenience stores, kiosks, and much more.
- All models are certified NSF-6 safe for milk.



# I-PRO 3 FROZEN GRANITA DISPENSERS

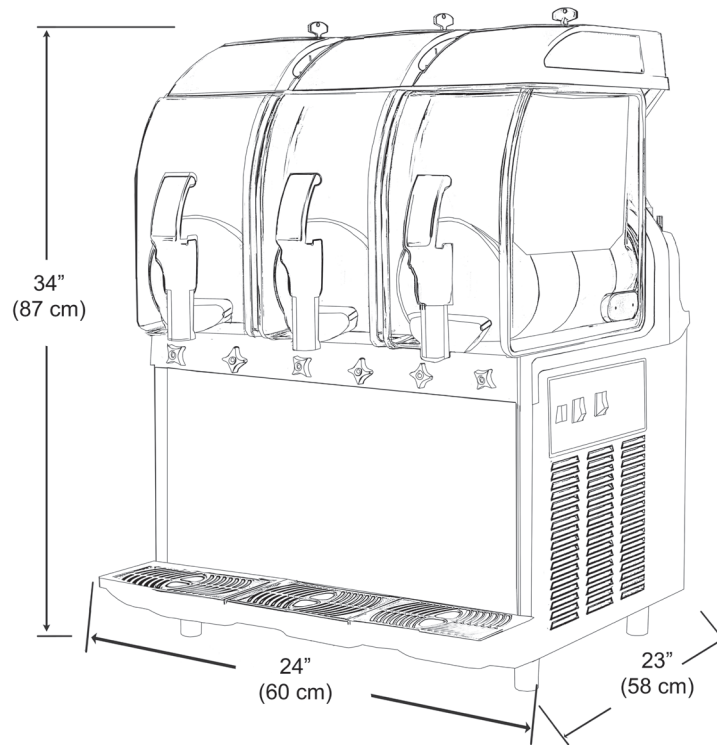

model I-PRO 3M

NSF-6



## MODELS & SPECIFICATIONS

Model	Description	Electrical	Product Dimensions (H x W x D)	Ship Dimensions (H x W x D)	Product Weight	Ship Weight
<b>I-PRO 3M</b> (1206-004)	(3) 2.9 gallon (11 L) insulated bowls, Mechanical control and timer, black finish	115V / 60 Hz 1.3 kW / 14.4A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63cm)	179 lbs. (81 kg)	209 lbs. (95 kg)
<b>I-PRO 3M light panel</b> (1206-005)	(3) 2.9 gallon (11 L) insulated bowls, Mechanical control and timer, lighted panel, black finish	115V / 60 Hz 1.3 kW / 14.4A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63cm)	179 lbs. (81 kg)	209 lbs. (95 kg)
<b>I-PRO 3E</b> (1206-006)	(3) 2.9 gallon (11 L) insulated bowls, Electronic control and timer, black finish	115V / 60 Hz 1.2 kW / 12A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63cm)	179 lbs. (81 kg)	209 lbs. (95 kg)
<b>I-PRO 3E light panel</b> (1206-007)	(3) 2.9 gallon (11 L) insulated bowls, Electronic control and timer, lighted panel, black finish	115V / 60 Hz 1.2 kW / 12A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63cm)	179 lbs. (81 kg)	209 lbs. (95 kg)

**Refrigeration:** R404a

**Note:** Operate at room temperature between 75 - 90° F (24 and 32° C).

**Note:** Clearance of 8" (20 cm) required on all sides.

**Note:** Mixture must maintain a sugar content near 14%.

A lower concentration could seriously damage the mixing parts and gear motors.