	g co., inc.	Project Name: _			AIA #
U.S.A. FOODSERVICE					
2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)24	0-2400	Location: Item #:	Ot		SIS #
Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-2 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.t		Model #:			
Model: Glass Door Mercha	andiser:				
GDM-72-HC~TSL01 Swing Door Refrigerator w	ith Hydrocar	bon Refrigerant~ī	True Standar	d Look Versior	n 01
			GDM-	72-HC~T	SL01
				d's #1 manufactu or merchandisers	
			High cap	acity, factory bal	anced,
			to 38°F (.	tion system holds 5°C to 3.3°C) for k servation in extre	best
			Exterior -	non-peel or chip	
				coated cold rolled and permanent.	d steel;
	Interior - attractive, NSF approved, white aluminum interior liner with stainless steel floor.				
	Double pane thermal insulated glass swing doors. Black powder coated.				
				ng doors. Positiv pe closure syste	
Exterior Color Options			more eve	rior lighting provi en lighting throug Safety shielded.	ides ghout the
				binet structure is using Ecomate. A	
			density, p that has potential	polyurethane insi zero ozone deple (ODP) and zero o potential (GWP).	ulation etion global
			Bottom mo		
			No stoop product	p" lower shelf to ı visibility.	maximize
			Storage of	on top of cabinet	.
		A Ling-	Easily acc	cessible condens	er coil for
Standard Black Exterior Optional White Exterior	Optional	Stainless Exterior			
ROUGH-IN DATA			Specifications su	bject to change wi	thout notice
	dimensions round	led up to the nearest 1⁄8"			
			1 1		

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	W	D†	Н	HP	Voltage	Amps	Config.	• • •	(kg)
GDM-72-HC~TSL01	3	12	781⁄8	291⁄8	785⁄8	1⁄2	115/60/1	9.3	5-15P	9	630
			1985	759	1998	N/A		N/A		2.74	286

† Depth does not include 1<sup>3</sup>/<sub>8</sub>" (35 mm) for door handles.

	natural refrigerant.	APPROVALS:	AVAILABLE AT:
9/18 Printed in U.S.A.			

# Model:

# **Glass Door Merchandiser:**

Swing Door Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01

STANDARD FEATURES

GDM-72-HC~TSL01

#### DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

## **REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

# **CABINET CONSTRUCTION**

- Exterior non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner with stainless steel floor.

- Insulation entire cabinet structure is foamedin-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
  Frame rail fitted with leg levelers.

## DOORS

- Double pane thermal insulated glass swing doors. Black powder coated frames.
- Each door fitted with 12" (305 mm) long extruded handle.
- Self closing doors. Positive seal, torsion type closure system.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

## SHELVING


- Twelve (12) adjustable, heavy duty PVC coated wire shelves 24 <sup>1</sup>/<sub>8</sub> "L x 20 <sup>3</sup>/<sub>4</sub> "D (613 mm x 528 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

#### LIGHTING

• LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

## **MODEL FEATURES**

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.



• Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

#### ELECTRICAL


 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



# **OPTIONAL FEATURES/ACCESSORIES**

Upcharge and lead times may apply. Upcharge and lead times may apply.

- □ Stainless steel exterior.
- Black aluminum interior liner with black shelving.
- □ Stainless steel interior liner.
- G" (153 mm) standard legs.
- □ 6" (153 mm) seismic/flanged legs.
- □ 2<sup>1</sup>/<sub>2</sub>" (64 mm) diameter castors.
- □ 4" (102 mm) diameter castors.
- Red wine thermostat.
- U White wine thermostat.
- Chocolate thermostat.
- Barrel Locks located in grill assembly (requires one per door)
- Wine racks.
- Additional shelves.
- TrueFlex gravity feed organizers.
- Pricing strips.

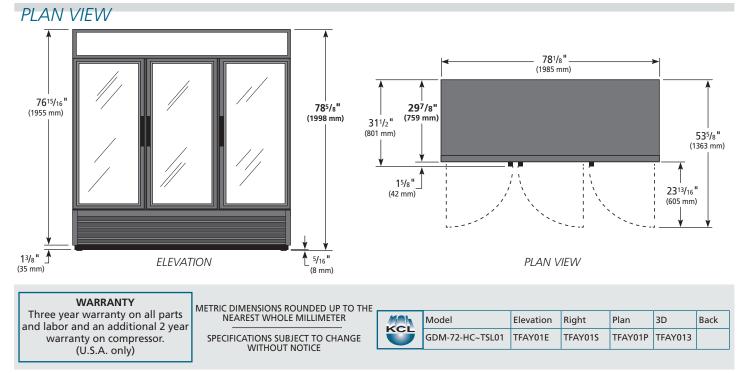

# TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

